

AVAILABLE FROM



EMP Estrusione Materiali Plastici SA - Via Lische 11/13 - 6855 STABIO - Svizzera - tel. +41 916417272 fax +41 916417295 - www.macrolux-emp.com

The tolerance are in mm. For any other specific request, please contact EMP SA Sales Department.


All information, direction or advice given by EMP SA as to the performance characteristics, application design or use of its materials is given in good faith and to the best of its knowledge. However as EMP SA has no control over the use to which others put its materials, it does not accept any liability there from in connection with any services rendered by it or for the design characteristics or performance of the material either towards any purchaser or use thereof or towards any third party. Each user of the materials should make his own tests to determine the materials suitability for his use. Standard tolerance on weight $\pm 5\%$. Standard tolerance on thickness ± 1 mm on average value. EMP SA reserves the right to change any of the data stated in this brochure at all time and without any previous announcement. This brochure has been translated in good faith from the Italian original. EMP SA will not take any responsibility for any errors or problems of interpretation of the translated text.

cod. 900725 copyright ISO 02-2007

EMP ESTRUSIONE MATERIALI PLASTICI s.a.

MORE LIGHT FOR A BETTER LIFE!

THE GREENHOUSE EFFECT?

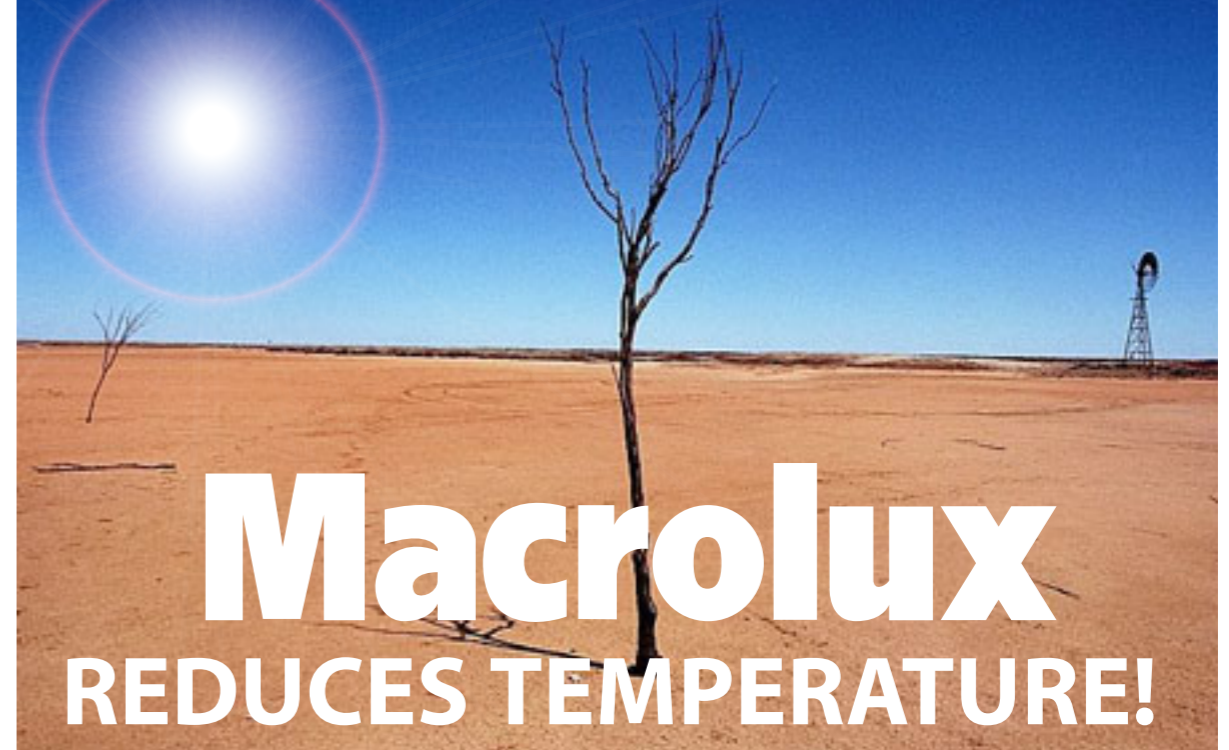

Macrolux


REDUCES TEMPERATURE!

Macrolux ATHERMIC OPAL

MULTIWALL POLYCARBONATE SHEETS WITH HIGH SOLAR PROTECTION

- **3Wall 6-8-10 mm**
- **XStrong 16 mm**
- **5 Wall 16 - 25 mm**
- **M Structure 25-32-35 mm**

- **Conservatories**
- **Malls**
- **Sport halls**
- **Skylights**
- **Tunnel**
- **Pedestrian walks**

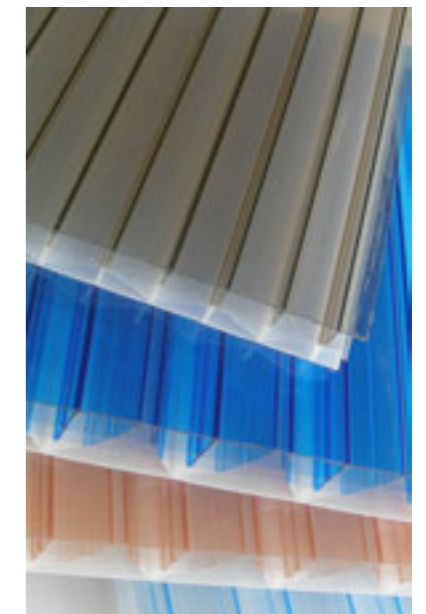

EMP ESTRUSIONE MATERIALI PLASTICI s.a.

Macrolux multiwall polycarbonate sheets

SOLAR CONTROL SHEETS

The energy transmitted by the solar rays has to be controlled, if necessary it could be maximised for example in greenhouses application or where the translucent part is minimum but in many applications it is necessary to reduce the unpleasant serra effect. Controlling the amount of solar energy which is transmitted into a structure is an essential parameter for environment comfort. To this aim, EMP has studied a complete series of solar control sheets:

HEAT SHIELD - ATHERMIC - ATHERMIC OPAL - IR

The **Macrolux® Heatshield sheets** are extruded with the UV block additive and heat reflective material: the result is a crystal clear sheet with a heat reflective upper layer. The **Macrolux® Athermic sheets** are produced adding metal particles in the mass of the products together with polycarbonate. These are one colour sheets and **EMP** offers 2 different possibilities grey and deep grey colour with different LT and performances. The **Macrolux® Athermic-Opal sheets** are **DOUBLE** colour sheets with on the lower side an opal tone (light or deep) and on the upper side different colours all with **METALLIC PARTICLES** in it. Thanks to these the sun is partially reflected and partially transformed in energy that remains in athermic upper side of the sheet. The **Macrolux® IR sheets** is the **NEW GENERATION** of Heat Reducers. In this product it has been added an additive that stops completely the infrared rays which permits to maintain a good level of LT reaching a very good heat reduction.

PRODUCTION RANGE


3WQ section = triple wall QUADRO



A mm	B mm	WEIGHT Kg/m ²	COLOUR	SIZES AVAILABLE Width x Length
6	8	1.3	Athermic 0777	2100 x 6/7000 (*1200 x 6/7000 Special dimensions on request
8	8	1.5	Athermic grey/opal 0737	
10	8	1.7	NEW! IR 0181	

(* can only be produced with open edges.

5X Strong section = 5X reinforced walls




NEW PRODUCT!

A mm	B mm	WEIGHT Kg/m ²	COLOUR	SIZES AVAILABLE Width x Length
16	14	2.5	Athermic 0777	2100 x 6/7000 (*1200 x 6/7000 Special dimensions on request
			Athermic grey/opal 0737	
20	14	2.9	NEW! IR 0181	


(* can only be produced with open edges.

5W section = five wall



A mm	B mm	WEIGHT Kg/m ²	COLOUR	SIZES AVAILABLE Width x Length
16	20	2.7	Athermic 0777	2100 x 6/7000 1200 x 6/7000 Special dimensions on request
		2.8	Athermic grey/opal 0737	
25	20	3.3	NEW! IR 0181	

5RW section = five reinforced walls



A mm	B mm	WEIGHT Kg/m ²	COLOUR	SIZES AVAILABLE Width x Length
25	32	3.3	Athermic 0777	2100 x 6/7000 1230 x 6/7000 Special dimensions on request
32	32	3.6	Athermic grey/opal 0737	
35	32	3.8	NEW! IR 0181	

Weight: ±5%; lengths up to 6000 mm: -0+20 mm; above 6001 mm: -0+30 mm.
Macrolux® sheet can be produced with open or closed edges. For further information contact our sales offices.

NOTE: SOME COLOURS ARE SUBJECTED TO MINIMUM QUANTITIES

THE GREENHOUSE EFFECT?


Macrolux
REDUCES TEMPERATURE!

The greenhouse effect is the rise in temperature that the Earth experiences because certain gases in the atmosphere (water vapor, carbon dioxide, nitrous oxide, and methane, for example) trap energy from the sun. Without these gases, heat would escape back into space and Earth's average temperature would be about 60°F colder. Because of how they warm our world, these gases are referred to as greenhouse gases.

Do not ignore the consequences of the GREENHOUSE EFFECT!

Thanks to the **SOLAR PROTECTION** property of our **Macrolux athermic opal** sheets we can now have an effective protection against the increase of the temperatures caused by the greenhouse effect.

With the **Macrolux athermic opal** sheets you can have a good control of the inside heat and maintain a comforting environment

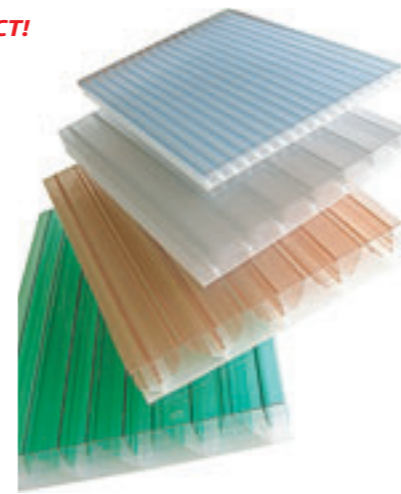

COLOUR TABLE	CODE
Heatshield	305
Heatshield	338
IR	181
Pinky IR	382
Athermic blue /opal	537
Athermic blue / deep opal	539
Athermic green /opal	437
Athermic green / deep opal	439
Athermic gray/opal	737
Athermic gray/ deep opal	739
Athermic copper/opal	937
Athermic copper/deep opal	939

TECHNICAL INFORMATION

LIGHT TRANSMISSION

A correct technical planning regarding light requires control of the amount of light needed within any given structure. It is therefore evident how important it is to use sheets with a correct light transmission. The light transmission values for **MACROLUX®** sheets in the various colours and versions are listed below:

Structure	Thickness (mm)	Weight (kg/m ²)	Light transmission LT (%)					IR (0181)
			Heat Shield (0305)	Super life (0032)	Athermic (0777)	Athermic -opal (0737*)	Athermic -opal (0739*)	
3Q	6	1,3	-	-	35	50	40	-
3Q	8	1,5	65	25	35	45	30	35
3Q	10	1,7	65	25	35	45	30	35
5X	16	2,5	55	25	25	25	12	30
5W	16	2,7	55	10	25	25	12	30
5X	20	2,9	63	10	25	25	12	30
5W	25	3,3	50	5	20	20	5	25
5RW	25	3,3	50	5	20	20	5	25
5RW	32	3,6	40	5	13	13	5	20
5RW	35	3,8	40	5	13	13	5	20

Internal measurements in accordance with the ASTM D1003 regulation Light diffusion may vary by plus or minus 5 numeric

SHADING COEFFICIENT

The shading coefficient (SC) represents the ratio between total energy, which passes through the polycarbonate sheet, and the total solar energy, which passes through a clear monolithic glass with a 3 mm thickness.

Structure	Thickness (mm)	Weight (kg/m ²)	Shading coefficient (SC)					IR (0181)
			Heat Shield (0305)	Super life (0032)	Athermic (0777)	Athermic -opal (0737*)	Athermic -opal (0739*)	
3Q	6	0.53	-	-	0.59	0.61	0.60	-
3Q	8	1,5	0.67	0.53	0.55	0.56	0.52	0.49
3Q	10	1,7	0.64	0.52	0.52	0.54	0.51	0.47
5X	16	2,5	0.53	0.40	0.40	0.47	0.43	0.40
5W	16	2,7	0.63	0.40	0.38	0.47	0.43	0.40
5X	20	2,9	0.53	0.43	0.40	0.46	0.41	0.39
5W	25	3,3	0.46	0.43	0.41	0.45	0.40	0.38
5RW	25	3,3	0.48	0.32	0.43	0.43	0.38	0.38
5RW	32	3,6	0.41	0.43	0.40	0.44	0.39	0.37
5RW	35	3,8	0.41	0.41	0.39	0.43	0.37	0.35

Value measured with the relation $SC = (1,15 \times G)/100$ where:
 SC = shading coefficient
 G = solar factor (G-value)

SOLAR FACTOR (G-value)

The G-value is the percentage ratio of the solar energy which passes through the sheet (TS) and the incident energy; the energy transmitted by the sheet is the sum of the direct energy (TD) and of the energy which the sheet draw again towards the interior of the structure (Ai).

Structure	Thickness (mm)	Weight (kg/m ²)	G-value (%)				IR (0181)
			Super life (0032)	Athermic (0777)	Athermic -opal (0737*)	Athermic -opal (0739*)	
3Q	6	1,3	-	50	53	51	-
3Q	8	1,5	46	48	49	45	43
3Q	10	1,7	45	45	47	44	41
5X	16	2,5	35	35	41	37	35
5W	16	2,7	35	35	41	37	35
5X	20	2,9	37	35	40	36	34
5W	25	3,3	37	36	39	35	33
5RW	25	3,3	37	36	37	33	33
5RW	32	3,6	37	35	38	34	32
5RW	35	3,8	36	34	37	32	30

